

DIN 7976 - ISO 1479

SECHSKANT-BLECHSCHRAUBEN


MIT LÄNGSSCHLITZ - KOPF SCHARFKANTIG ABGEGRÄTET

HEXAGON HEAD SELF TAPPING SCREWS

WITH SLOT - SHARP SHAPED HEAD

VIS À TÔLE-TÊTE HEXAGONALE

AVEC FENTE - BOUT POINTU

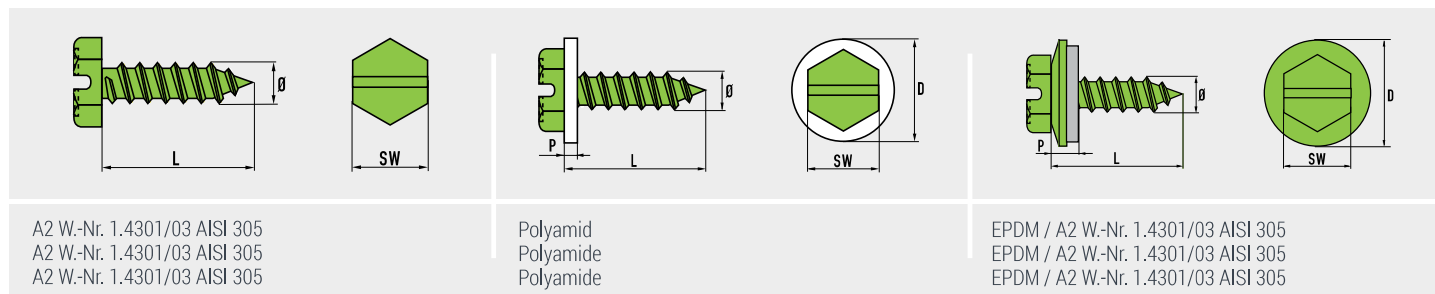

Ø	SW	L	P	D	Material	20301		20302		20304	
						CODE	QTY	CODE	QTY	CODE	QTY
Ø 4,2 mm SW = 7 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C		4,2 x 9,5 mm	2,0 mm	10,0 mm	Polyamid	1000	20301 42950	3,0 mm	12,0 mm	500	20304 42950
		4,2 x 13 mm	2,0 mm	10,0 mm	Polyamide	1000	20301 42130	3,0 mm	12,0 mm	500	20304 42130
		4,2 x 16 mm	2,0 mm	10,0 mm		1000	20301 42160	3,0 mm	12,0 mm	500	20304 42160
		4,2 x 19 mm	2,0 mm	10,0 mm		1000	20301 42190	3,0 mm	12,0 mm	500	20304 42190
		4,2 x 25 mm	2,0 mm	10,0 mm		500	20301 42250	3,0 mm	12,0 mm	500	20304 42250
Ø 4,8 mm SW = 8 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C		4,8 x 9,5 mm	2,0 mm	10,0 mm	Polyamid	1000	20301 48950	3,0 mm	12,0 mm	500	20304 48950
		4,8 x 13 mm	2,0 mm	10,0 mm	Polyamide	1000	20301 48130	3,0 mm	12,0 mm	500	20304 48130
		4,8 x 16 mm	2,0 mm	10,0 mm		1000	20301 48160	3,0 mm	12,0 mm	500	20304 48160
		4,8 x 19 mm	2,0 mm	10,0 mm		500	20301 48190	3,0 mm	12,0 mm	500	20304 48190
		4,8 x 25 mm	2,0 mm	10,0 mm		500	20301 48250	3,0 mm	12,0 mm	250	20304 48250
Ø 5,5 mm SW = 8 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C		5,5 x 16 mm	2,0 mm	11,0 mm	Polyamid	500	20301 55160	3,0 mm	16,0 mm	250	20304 55160
		5,5 x 19 mm	2,0 mm	11,0 mm	Polyamide	500	20301 55190	3,0 mm	16,0 mm	250	20304 55190
		5,5 x 25 mm	2,0 mm	11,0 mm		500	20301 55250	3,0 mm	16,0 mm	250	20304 55250
Ø 6,3 mm SW = 10 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C		6,3 x 16 mm	2,0 mm	12,5 mm	Polyamid	500	20301 63160	3,0 mm	16,0 mm	250	20304 63160
		6,3 x 19 mm	2,0 mm	12,5 mm	Polyamide	500	20301 63190	3,0 mm	16,0 mm	250	20304 63190
		6,3 x 25 mm	2,0 mm	12,5 mm		250	20301 63250	3,0 mm	16,0 mm	250	20304 63250