

DIN 7976 - ISO 1479

SECHSKANT-BLECHSCHRAUBEN


MIT LÄNGSSCHLITZ - KOPF SCHARFKANTIG ABGEGRÄTET

HEXAGON HEAD SELF TAPPING SCREWS

WITH SLOT - SHARP SHAPED HEAD

VIS À TÔLE-TÊTE HEXAGONALE

AVEC FENTE - BOUT POINTU

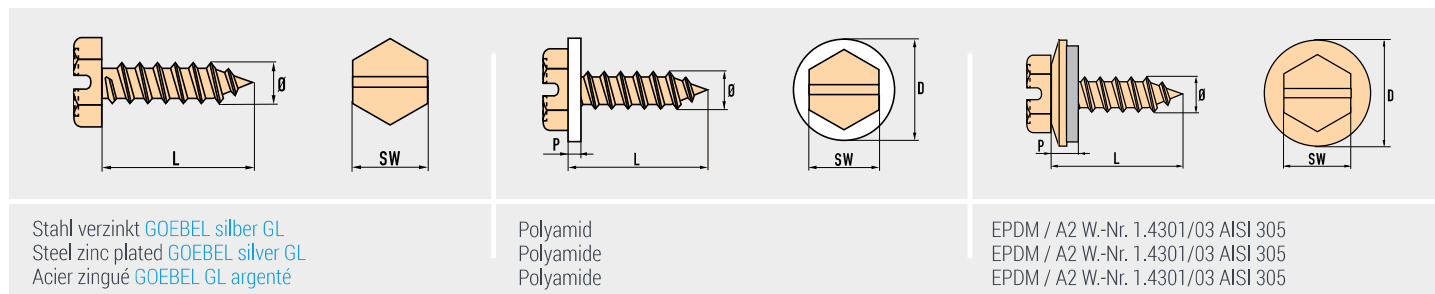

Ø 4,2 mm

SW = 7 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

| 4,2 x 9,5 mm | |
|--------------|--|
| 4,2 x 13 mm | |
| 4,2 x 16 mm | |
| 4,2 x 19 mm | |
| 4,2 x 25 mm | |

| CODE | P | D | CODE | P | D | CODE | P | D | CODE |
|----------------------------------|--------|---------|----------------------------------|--------|---------|---------------------------------|---|---|------|
| 1000 20201 42950 | 2,0 mm | 10,0 mm | 1000 20202 42950 | 3,0 mm | 12,0 mm | 500 20203 42950 | | | |
| 1000 20201 42130 | 2,0 mm | 10,0 mm | 1000 20202 42130 | 3,0 mm | 12,0 mm | 500 20203 42130 | | | |
| 1000 20201 42160 | 2,0 mm | 10,0 mm | 500 20202 42160 | 3,0 mm | 12,0 mm | 500 20203 42160 | | | |
| 1000 20201 42190 | 2,0 mm | 10,0 mm | 500 20202 42190 | 3,0 mm | 12,0 mm | 500 20203 42190 | | | |
| 500 20201 42250 | 2,0 mm | 10,0 mm | 500 20202 42250 | 3,0 mm | 12,0 mm | 500 20203 42250 | | | |

Ø 4,8 mm

SW = 8 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

| | |
|--------------|--|
| 4,8 x 9,5 mm | |
| 4,8 x 13 mm | |
| 4,8 x 16 mm | |
| 4,8 x 19 mm | |
| 4,8 x 25 mm | |

| | | | | | | |
|----------------------------------|--------|---------|----------------------------------|--------|---------|---------------------------------|
| 1000 20201 48950 | 2,0 mm | 10,0 mm | 1000 20202 48950 | 3,0 mm | 12,0 mm | 500 20203 48950 |
| 1000 20201 48130 | 2,0 mm | 10,0 mm | 1000 20202 48130 | 3,0 mm | 12,0 mm | 500 20203 48130 |
| 1000 20201 48160 | 2,0 mm | 10,0 mm | 500 20202 48160 | 3,0 mm | 12,0 mm | 500 20203 48160 |
| 500 20201 48190 | 2,0 mm | 10,0 mm | 500 20202 48190 | 3,0 mm | 12,0 mm | 500 20203 48190 |
| 500 20201 48250 | 2,0 mm | 10,0 mm | 500 20202 48250 | 3,0 mm | 12,0 mm | 250 20203 48250 |

Ø 5,5 mm

SW = 8 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

| | |
|-------------|--|
| 5,5 x 16 mm | |
| 5,5 x 19 mm | |
| 5,5 x 25 mm | |

| | | | | | | |
|---------------------------------|--------|---------|---------------------------------|--------|---------|---------------------------------|
| 500 20201 55160 | 2,0 mm | 11,0 mm | 500 20202 55160 | 3,0 mm | 16,0 mm | 250 20203 55160 |
| 500 20201 55190 | 2,0 mm | 11,0 mm | 500 20202 55190 | 3,0 mm | 16,0 mm | 250 20203 55190 |
| 500 20201 55250 | 2,0 mm | 11,0 mm | 250 20202 55250 | 3,0 mm | 16,0 mm | 250 20203 55250 |

Ø 6,3 mm

SW = 10 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

| | |
|-------------|--|
| 6,3 x 16 mm | |
| 6,3 x 19 mm | |
| 6,3 x 25 mm | |

| | | | | | | |
|---------------------------------|--------|---------|---------------------------------|--------|---------|---------------------------------|
| 500 20201 63160 | 2,0 mm | 12,5 mm | 500 20202 63160 | 3,0 mm | 16,0 mm | 250 20203 63160 |
| 500 20201 63190 | 2,0 mm | 12,5 mm | 500 20202 63190 | 3,0 mm | 16,0 mm | 250 20203 63190 |
| 250 20201 63250 | 2,0 mm | 12,5 mm | 250 20202 63250 | 3,0 mm | 16,0 mm | 250 20203 63250 |