

**DICHT-BECHERBLINDNIETE**

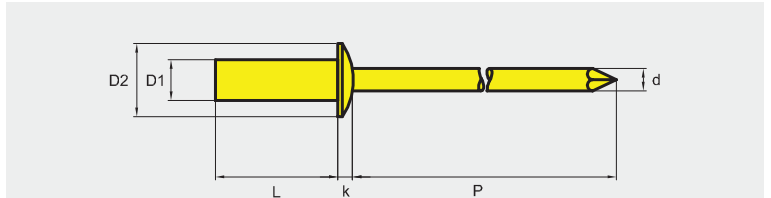
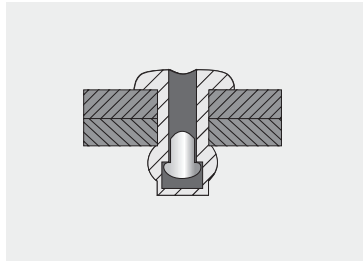
FLACHRUNDKOPF (~ DIN EN ISO 15976)

**SEALED BLIND RIVETS**

DOMED HEAD (~ DIN EN ISO 15976)

**RIVETS ÉTANCHES**


TÊTE PLATE (~ DIN EN ISO 15976)










Stahl verzinkt  
Steel zinc plated  
Acier zingué


Stahl verzinkt  
Steel zinc plated  
Acier zingué








**Ø 3,2 mm**

D1 = 3,2 + 0,08 / - 0,10 mm  
D2 = 6,0 + / - 0,24 mm  
k = 1,0 + / - 0,29 mm  
d = 1,9 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 3,3 mm


|  |  |  |  |  |  |  |
|---|--|---|---|---|---|---|
| 3,2 x 6,0 mm  | 0,5 - 1,5 mm   | 21901 32600   | 1600 N  | 2000 N  | 1000  | 10000   |
| 3,2 x 8,0 mm  | 1,5 - 3,0 mm   | 21901 32800   |   |   | 1000  | 10000   |
| 3,2 x 9,5 mm  | 3,0 - 5,0 mm   | 21901 32950   |   |   | 1000  | 10000   |
| 3,2 x 12,0 mm   | 5,0 - 6,5 mm   | 21901 32120   |   |   | 1000  | 10000   |








**Ø 4,0 mm**

D1 = 4,0 + 0,08 / - 0,10 mm  
D2 = 8,0 + / - 0,29 mm  
k = 1,4 + / - 0,35 mm  
d = 2,3 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 4,1 mm

|  |  |  |  |  |  |  |
|---|--|---|---|---|---|---|
| 4,0 x 6,0 mm  | 0,5 - 1,5 mm   | 21901 40600   | 2100 N  | 2300 N  | 500   | 5000  |
| 4,0 x 8,0 mm  | 1,5 - 3,0 mm   | 21901 40800   |   |   | 500   | 5000  |
| 4,0 x 9,5 mm  | 3,0 - 5,0 mm   | 21901 40950   |   |   | 500   | 5000  |
| 4,0 x 12,0 mm   | 5,0 - 6,5 mm   | 21901 40120   |   |   | 500   | 5000  |
| 4,0 x 15,0 mm   | 6,5 - 10,5 mm  | 21901 40150   |   |   | 500   | 5000  |

**Ø 4,8 mm**

D1 = 4,8 + 0,08 / - 0,10 mm  
D2 = 9,5 + / - 0,29 mm  
k = 1,7 + / - 0,3 mm  
d = 2,9 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 4,9 mm

|  |  |  |  |  |  |  |
|---|--|---|---|---|---|---|
| 4,8 x 8,0 mm  | 0,5 - 3,0 mm   | 21901 48800   | 2700 N  | 3600 N  | 250   | 2500  |
| 4,8 x 9,5 mm  | 3,0 - 5,0 mm   | 21901 48950   |   |   | 250   | 2500  |
| 4,8 x 12,0 mm   | 5,0 - 6,5 mm   | 21901 48120   |   |   | 250   | 2500  |
| 4,8 x 16,0 mm   | 6,5 - 10,5 mm  | 21901 48160   |   |   | 250   | 2500  |