
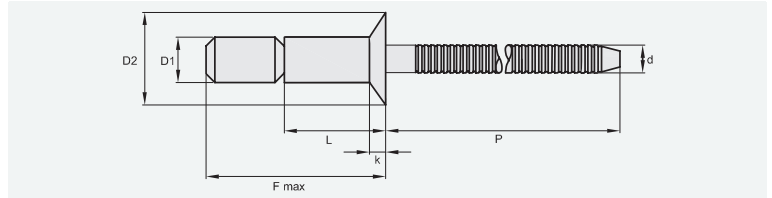


SENK KOPF (100°) MIT GERILLTEM NIETDORN COUNTERSUNK HEAD (100°) WITH GROOVED MANDREL TÊTE FRAISÉE (100°) CLOU CANNELÉ

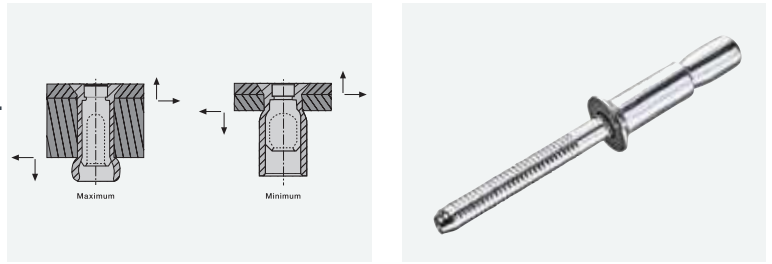

Aluminium AlMg 5 (5056 A)
Aluminium AlMg 5 (5056 A)
Aluminium AlMg 5 (5056 A)

Aluminium Legierung
Aluminium alloy
Aluminium alliage

Ø 4,8 mm

D1 = 4,8 + / - 0,09 mm

D2 = 9,0 + 0 / - 1,0 mm

k = 2,2 + / - 0,25 mm

d = 3,0 mm (Ref.)

P = ≥ 27,0 mm

L = + / - 0,99 mm

4,9 - 5,1 mm

	F max		CODE					
4,8 x 13,0 mm	20,0 mm	4,5 - 8,4 mm	77735 04813	2400 N	2000 N	222 N	250	2500
4,8 x 17,0 mm	27,0 mm	7,7 - 12,7 mm	77735 04817				250	2500

Ø 6,4 mm

D1 = 6,4 + 0 / - 0,11 mm

D2 = 10,5 + 0 / - 1,5 mm

k = 2,4 + / - 0,4 mm

d = 4,0 mm (Ref.)

P = ≥ 31,0 mm

L = + / - 0,99 mm

6,6 - 6,9 mm

	F max		CODE					
6,4 x 17,0 mm	27,0 mm	4,5 - 12,1 mm	77735 06417	5400 N	3600 N	445 N	250	2500
6,4 x 23,5 mm	37,0 mm	10,5 - 17,0 mm	77735 06423				250	2500

¹⁾ typische Werte typical values valeurs typiques

Technische Änderungen vorbehalten Subject to technical modifications Sous réserve de modifications (techniques)