

BLINDNIETE

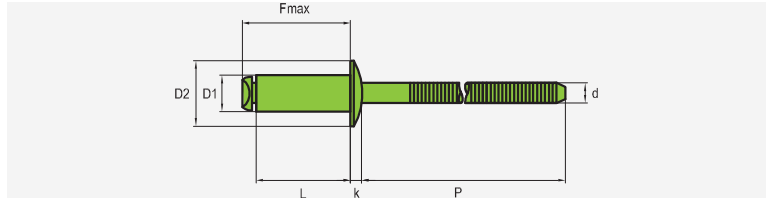
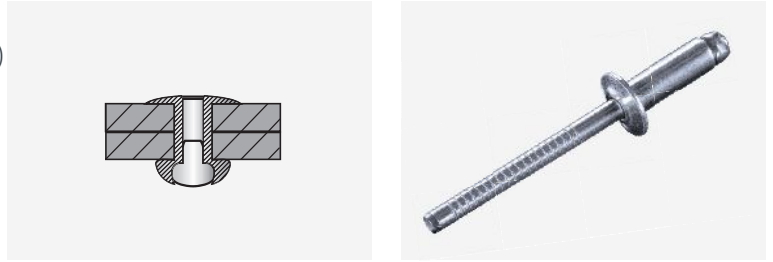
FLACHRUNDKOPF MIT GERILLTEM NIETDORN (~ DIN EN ISO 15983)

BLIND RIVETS

DOMED HEAD WITH GROOVED MANDREL (~ DIN EN ISO 15983)

RIVETS AVEUGLES


TÊTE PLATE AVEC CLOU CANNÉLÉ (~ DIN EN ISO 15983)









Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]


Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]







Ø 3,0 mm

D1 = 3,0 + 0,08 / - 0,1 mm
D2 = 6,5 + 0 / - 0,7 mm
k = 0,8 + / - 0,2 mm
d = 1,9 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,1 mm


	F-Max		CODE				
3,0 x 4,0 mm	8,4 mm	0,5 - 2,0 mm	70301 30400	1600 N	2000 N	1000	10000
3,0 x 6,0 mm	10,4 mm	1,0 - 3,0 mm	70301 30600			1000	10000
3,0 x 8,0 mm	12,4 mm	3,0 - 5,0 mm	70301 30800			1000	10000
3,0 x 10,0 mm	14,4 mm	5,0 - 7,0 mm	70301 30100			1000	10000
3,0 x 12,0 mm	16,4 mm	7,0 - 9,0 mm	70301 30120			1000	10000
3,0 x 16,0 mm	20,4 mm	9,0 - 13,0 mm	70301 30160			1000	10000







Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm
D2 = 6,5 + 0 / - 0,7 mm
k = 0,8 + / - 0,2 mm
d = 2,0 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,3 mm

	F-Max		CODE				
3,2 x 4,0 mm	8,9 mm	0,5 - 2,0 mm	70301 32400	1800 N	2500 N	1000	10000
3,2 x 6,0 mm	10,9 mm	1,0 - 3,0 mm	70301 32600			1000	10000
3,2 x 8,0 mm	12,9 mm	3,0 - 5,0 mm	70301 32800			1000	10000
3,2 x 10,0 mm	14,9 mm	5,0 - 7,0 mm	70301 32100			1000	10000
3,2 x 12,0 mm	16,9 mm	7,0 - 9,0 mm	70301 32120			1000	10000
3,2 x 16,0 mm	20,9 mm	9,0 - 12,0 mm	70301 32160			1000	10000
3,2 x 18,0 mm	22,9 mm	12,0 - 15,0 mm	70301 32180			1000	10000

Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm
D2 = 8,0 + 0 / - 1,0 mm
k = 1,0 + / - 0,3 mm
d = 2,5 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,1 mm

	F-Max		CODE				
4,0 x 6,0 mm	10,9 mm	1,0 - 2,5 mm	70301 40600	3100 N	3800 N	1000	10000
4,0 x 8,0 mm	12,9 mm	2,5 - 4,5 mm	70301 40800			1000	10000
4,0 x 10,0 mm	14,9 mm	4,5 - 6,5 mm	70301 40100			1000	10000
4,0 x 12,0 mm	16,9 mm	6,5 - 8,5 mm	70301 40120			500	5000
4,0 x 14,0 mm	18,9 mm	8,5 - 10,5 mm	70301 40140			500	5000
4,0 x 16,0 mm	20,9 mm	9,5 - 12,0 mm	70301 40160			500	5000
4,0 x 18,0 mm	22,9 mm	12,0 - 14,0 mm	70301 40180			500	5000
4,0 x 20,0 mm	24,9 mm	14,0 - 16,0 mm	70301 40200			500	5000
4,0 x 25,0 mm	29,9 mm	16,0 - 20,0 mm	70301 40250			500	5000
4,0 x 30,0 mm	34,9 mm	20,0 - 25,0 mm	70301 40300			500	5000

BLINDNIETE

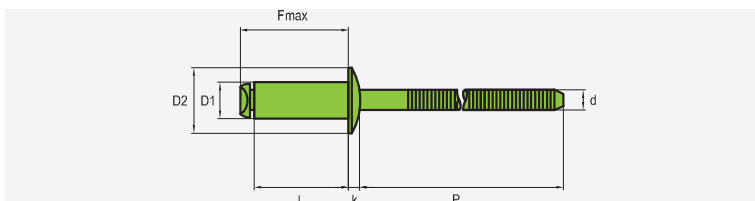
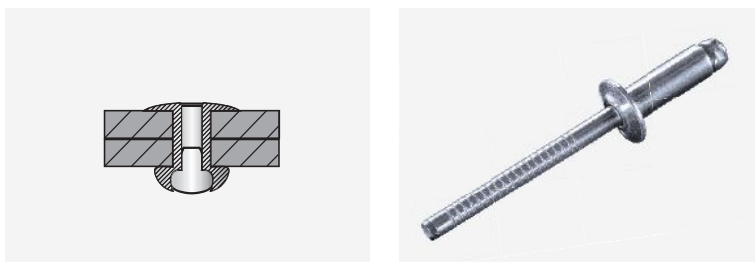
FLACHRUNDKOPF MIT GERILLEM NIETDORN (~ DIN EN ISO 15983)

BLIND RIVETS

DOMED HEAD WITH GROOVED MANDREL (~ DIN EN ISO 15983)

RIVETS AVEUGLES


TÊTE PLATE AVEC CLOU CANNÉLÉ (~ DIN EN ISO 15983)









Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]


Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]







Ø 4,8 mm

D1 = 4,8 + 0,08 / - 0,15 mm
D2 = 9,5 + 0 / - 1,0 mm
k = 1,1 +/- 0,3 mm
d = 2,9 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,9 mm

	F-Max		CODE				
4,8 x 8,0 mm	13,4 mm	1,5 - 4,0 mm	70301 48800	4500 N	6000 N	500	5000
4,8 x 10,0 mm	15,4 mm	4,0 - 6,0 mm	70301 48101			500	5000
4,8 x 10,5 mm	15,9 mm	4,5 - 6,5 mm	70301 48100			500	5000
4,8 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70301 48120			500	5000
4,8 x 14,0 mm	19,4 mm	8,0 - 9,5 mm	70301 48140			500	5000
4,8 x 16,0 mm	21,4 mm	9,5 - 11,0 mm	70301 48160			500	5000
4,8 x 18,0 mm	23,4 mm	11,0 - 13,0 mm	70301 48180			500	5000
4,8 x 20,0 mm	25,4 mm	11,0 - 15,0 mm	70301 48200			500	5000
4,8 x 22,0 mm	27,4 mm	15,0 - 17,0 mm	70301 48220			500	5000
4,8 x 25,0 mm	30,4 mm	17,0 - 20,0 mm	70301 48250			250	2500
4,8 x 30,0 mm	35,4 mm	21,0 - 25,0 mm	70301 48300	250	2500		

Ø 5,0 mm

D1 = 5,0 + 0,08 / - 0,15 mm
D2 = 9,5 + 0 / - 1,0 mm
k = 1,1 +/- 0,3 mm
d = 2,9 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 5,1 mm

	F-Max		CODE				
5,0 x 8,0 mm	13,4 mm	2,0 - 4,0 mm	70301 50800	5000 N	6500 N	500	5000
5,0 x 10,0 mm	15,4 mm	4,0 - 6,0 mm	70301 50100			500	5000
5,0 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70301 50120			500	5000
5,0 x 14,0 mm	19,4 mm	8,0 - 10,0 mm	70301 50140			500	5000
5,0 x 16,0 mm	21,4 mm	10,0 - 12,0 mm	70301 50160			500	5000
5,0 x 18,0 mm	23,4 mm	12,0 - 14,0 mm	70301 50180			500	5000
5,0 x 20,0 mm	25,4 mm	14,0 - 16,0 mm	70301 50200			500	5000
5,0 x 25,0 mm	30,4 mm	16,0 - 21,0 mm	70301 50250			250	2500
5,0 x 30,0 mm	35,4 mm	21,0 - 25,0 mm	70301 50300			250	2500
5,0 x 35,0 mm	40,4 mm	25,0 - 30,0 mm	70301 50350			250	2500
5,0 x 40,0 mm	45,4 mm	30,0 - 34,0 mm	70301 50400	250	2500		

BLINDNIETE

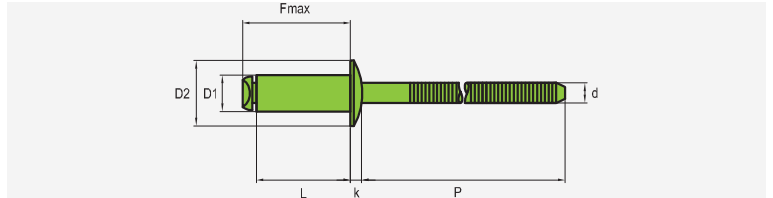
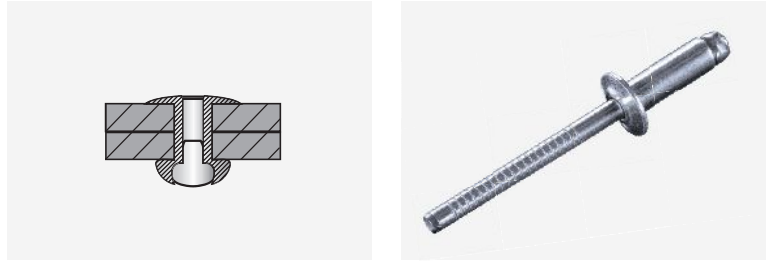
FLACHRUNDKOPF MIT GERILLEM NIETDORN (~ DIN EN ISO 15983)

BLIND RIVETS

DOMED HEAD WITH GROOVED MANDREL (~ DIN EN ISO 15983)

RIVETS AVEUGLES

TÊTE PLATE AVEC CLOU CANNÉLÉ (~ DIN EN ISO 15983)



Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]

Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]

Ø 6,0 mm

D1 = 6,0 + 0,08 / - 0,15 mm
D2 = 12,0 + 0 / - 1,5 mm
k = 1,5 +/- 0,4 mm
d = 3,6 mm
P = ≥ 31,0 mm
L = + 1,0 / - 0,2 mm
 6,1 mm

	F-Max		CODE				
6,0 x 10,0 mm	15,9 mm	2,0 - 4,0 mm	70301 60100	6500 N	8850 N		
6,0 x 12,0 mm	17,9 mm	4,0 - 6,0 mm	70301 60120				
6,0 x 15,0 mm	20,9 mm	6,0 - 9,0 mm	70301 60150				
6,0 x 18,0 mm	23,9 mm	9,0 - 12,0 mm	70301 60180				
6,0 x 20,0 mm	25,9 mm	10,0 - 14,0 mm	70301 60200				
6,0 x 25,0 mm	30,9 mm	15,0 - 19,0 mm	70301 60250				

Ø 6,4 mm

D1 = 6,4 + 0,08 / - 0,15 mm
D2 = 13,0 + 0 / - 1,5 mm
k = 1,8 +/- 0,4 mm
d = 3,85 mm
P = ≥ 31,0 mm
L = + 1,0 / - 0,2 mm
 6,5 mm

	F-Max		CODE				
6,4 x 10,0 mm	16,4 mm	2,0 - 4,0 mm	70301 64100	6500 N	8850 N		
6,4 x 12,0 mm	18,4 mm	4,0 - 6,0 mm	70301 64120				
6,4 x 15,0 mm	21,4 mm	6,0 - 9,0 mm	70301 64150				
6,4 x 18,0 mm	24,4 mm	9,0 - 13,0 mm	70301 64180				
6,4 x 20,0 mm	26,4 mm	13,0 - 16,0 mm	70301 64200				
6,4 x 25,0 mm	31,4 mm	16,0 - 20,0 mm	70301 64250				