
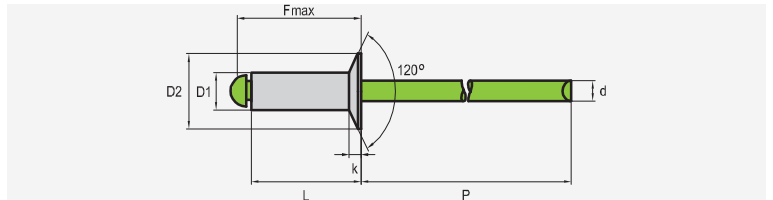


BLINDNIETE SENKKOPF 120°

BLIND RIVETS COUNTERSUNK HEAD 120°

RIVETS AVEUGLES AVEUGLES TÊTE FRAISÉE 120°

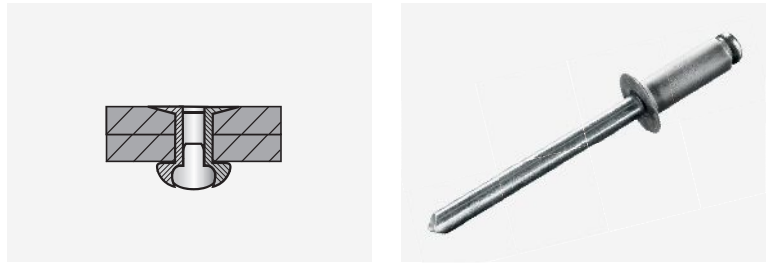

Aluminium AIMG 5,0
Aluminium AIMG 5,0
Aluminium AIMG 5,0

Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]

Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm
D2 = 6,0 + 0 / - 0,4 mm
k = -
d = 1,75 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,3 mm

	F-Max		CODE				
3,2 x 6,0 mm	10,9 mm	1,5 - 3,5 mm	70251 32600	720 N	800 N		
3,2 x 8,0 mm	12,9 mm	3,5 - 5,0 mm	70251 32800				
3,2 x 10,0 mm	14,9 mm	5,0 - 7,0 mm	70251 32100				
3,2 x 12,0 mm	16,9 mm	7,0 - 9,0 mm	70251 32120				
3,2 x 14,0 mm	18,9 mm	9,0 - 10,5 mm	70251 32140				

Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm
D2 = 7,5 + 0 / - 0,5 mm
k = -
d = 2,1 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,1 mm

	F-Max		CODE				
4,0 x 6,0 mm	10,9 mm	1,5 - 3,0 mm	70251 40600	1100 N	1400 N		
4,0 x 8,0 mm	12,9 mm	3,0 - 5,0 mm	70251 40800				
4,0 x 10,0 mm	14,9 mm	5,0 - 6,5 mm	70251 40100				
4,0 x 12,0 mm	16,9 mm	6,5 - 8,5 mm	70251 40120				
4,0 x 14,0 mm	18,9 mm	8,5 - 10,5 mm	70251 40140				
4,0 x 16,0 mm	20,9 mm	10,5 - 12,5 mm	70251 40160				

Ø 4,8 mm



D1 = 4,8 + 0,08 / - 0,15 mm
D2 = 9,0 + 0 / - 0,5 mm
k = -
d = 2,7 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,9 mm

	F-Max		CODE				
4,8 x 8,0 mm	13,4 mm	2,0 - 4,5 mm	70251 48800	1500 N	1900 N		
4,8 x 10,0 mm	15,4 mm	4,5 - 6,0 mm	70251 48100				
4,8 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70251 48120				
4,8 x 14,0 mm	19,4 mm	8,0 - 10,0 mm	70251 48140				
4,8 x 16,0 mm	21,4 mm	10,0 - 12,0 mm	70251 48160				
4,8 x 18,0 mm	23,4 mm	12,0 - 14,0 mm	70251 48180				
4,8 x 20,0 mm	25,4 mm	14,0 - 16,0 mm	70251 48200				
4,8 x 25,0 mm	30,4 mm	16,0 - 21,0 mm	70251 48250				

BLINDNIETE SENKKOPF 120°

BLIND RIVETS COUNTERSUNK HEAD 120°

RIVETS AVEUGLES AVEUGLES TÊTE FRAISÉE 120°

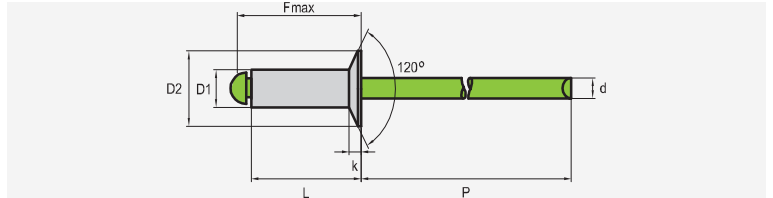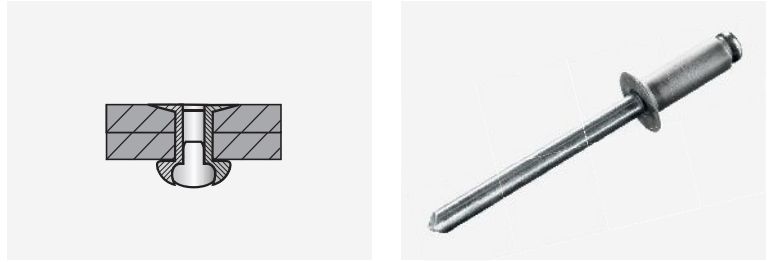

Aluminium AIMG 5,0
Aluminium AIMG 5,0
Aluminium AIMG 5,0

Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]

Ø 5,0 mm

D1 = 5,0 + 0,08 / - 0,15 mm

D2 = 9,0 + 0 / - 0,5 mm







k = -

d = 2,7 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

 5,1 mm

	F-Max		CODE				
5,0 x 8,0 mm	13,4 mm	2,5 - 4,0 mm	70251 50800	1820 N	2100 N	500	5000
5,0 x 10,0 mm	15,4 mm	4,0 - 6,0 mm	70251 50100			500	5000
5,0 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70251 50120			500	5000
5,0 x 14,0 mm	19,4 mm	8,0 - 10,0 mm	70251 50140			500	5000
5,0 x 16,0 mm	21,4 mm	10,0 - 12,0 mm	70251 50160			500	5000
5,0 x 18,0 mm	23,4 mm	12,0 - 14,0 mm	70251 50180			500	5000
5,0 x 20,0 mm	30,4 mm	14,0 - 17,0 mm	70251 50200			500	5000
5,0 x 25,0 mm	35,4 mm	17,0 - 21,0 mm	70251 50250			250	2500