

BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15977)

BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15977)

RIVETS AVEUGLES


TÊTE PLATE (~ DIN EN ISO 15977)

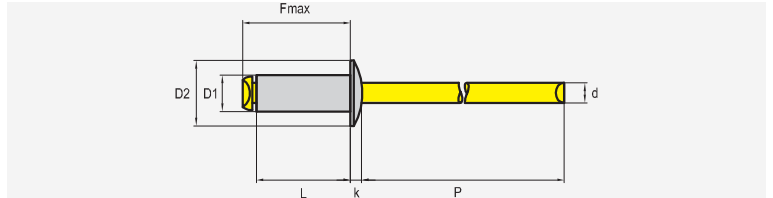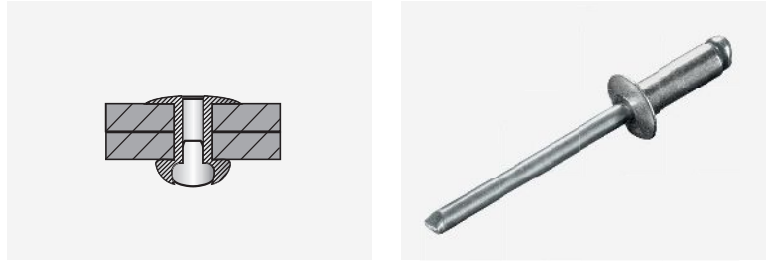







Aluminium AIMG 2,5
Aluminium AIMG 2,5
Aluminium AIMG 2,5


Stahl verzinkt
Steel zinc plated
Acier zingué







Ø 2,4 mm

D1 = 2,4 + 0,08 / - 0,1 mm
D2 = 5,0 + 0 / - 0,7 mm
k = 0,7 + / - 0,15 mm
d = 1,45 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 2,5 mm


	F-Max		CODE				
2,4 x 4,0 mm	8,4 mm	0,5 - 2,0 mm	70701 24400	315 N	355 N	1000	10000
2,4 x 6,0 mm	10,4 mm	2,0 - 4,0 mm	70701 24600			1000	10000
2,4 x 8,0 mm	12,4 mm	4,0 - 6,0 mm	70701 24800			1000	10000
2,4 x 10,0 mm	14,4 mm	6,0 - 8,0 mm	70701 24100			1000	10000
2,4 x 12,0 mm	16,4 mm	8,0 - 10,0 mm	70701 24120			1000	10000







Ø 3,0 mm

D1 = 3,0 + 0,08 / - 0,1 mm
D2 = 6,5 + 0 / - 0,7 mm
k = 0,8 + / - 0,15 mm
d = 1,75 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,1 mm

	F-Max		CODE				
3,0 x 4,0 mm	8,4 mm	0,5 - 1,5 mm	70701 30400	600 N	700 N	1000	10000
3,0 x 6,0 mm	10,4 mm	1,5 - 3,5 mm	70701 30600			1000	10000
3,0 x 7,0 mm	11,4 mm	3,0 - 5,0 mm	70701 30700			1000	10000
3,0 x 8,0 mm	12,4 mm	3,5 - 5,5 mm	70701 30800			1000	10000
3,0 x 10,0 mm	14,4 mm	5,5 - 7,0 mm	70701 30100			1000	10000
3,0 x 12,0 mm	16,4 mm	7,0 - 9,0 mm	70701 30120			1000	10000
3,0 x 14,0 mm	18,4 mm	9,0 - 11,0 mm	70701 30140			1000	10000
3,0 x 16,0 mm	20,4 mm	11,0 - 13,0 mm	70701 30160			1000	10000
3,0 x 18,0 mm	22,4 mm	13,0 - 15,0 mm	70701 30180			1000	10000
3,0 x 20,0 mm	24,4 mm	15,0 - 17,0 mm	70701 30200			500	5000

Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm
D2 = 6,5 + 0 / - 0,7 mm
k = 0,8 + / - 0,15 mm
d = 1,75 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,3 mm

	F-Max		CODE				
3,2 x 4,0 mm	8,9 mm	0,5 - 1,5 mm	70701 32430	720 N	800 N	1000	10000
3,2 x 6,0 mm	10,9 mm	1,5 - 3,0 mm	70701 32600			1000	10000
3,2 x 8,0 mm	12,9 mm	3,0 - 5,0 mm	70701 32800			1000	10000
3,2 x 10,0 mm	14,9 mm	5,0 - 7,0 mm	70701 32100			1000	10000
3,2 x 12,0 mm	16,9 mm	7,0 - 9,0 mm	70701 32120			1000	10000
3,2 x 14,0 mm	18,9 mm	9,0 - 11,0 mm	70701 32140			1000	10000
3,2 x 16,0 mm	20,9 mm	11,0 - 13,0 mm	70701 32160			1000	10000
3,2 x 18,0 mm	22,9 mm	13,0 - 15,0 mm	70701 32180			1000	10000
3,2 x 20,0 mm	24,9 mm	15,0 - 17,0 mm	70701 32200			500	5000
3,2 x 25,0 mm	29,9 mm	17,0 - 22,0 mm	70701 32250			500	5000

BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15977)

BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15977)

RIVETS AVEUGLES


TÊTE PLATE (~ DIN EN ISO 15977)



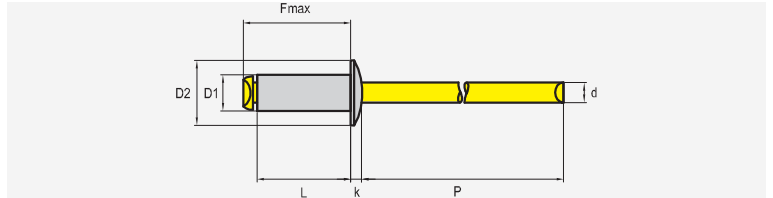
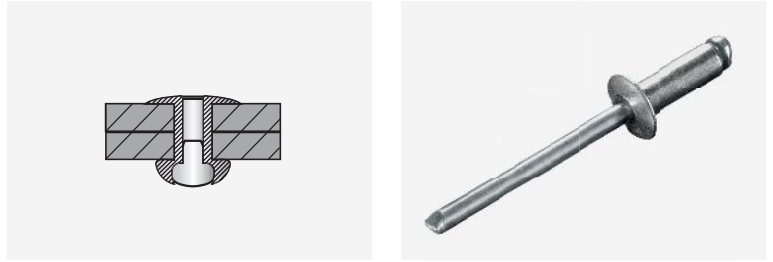




Aluminium AIMG 3,5
Aluminium AIMG 3,5
Aluminium AIMG 3,5


Stahl verzinkt
Steel zinc plated
Acier zingué







Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm
D2 = 8,0 + 0 / - 1,0 mm
k = 1,0 + / - 0,3 mm
d = 2,1 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,1 mm

	F-Max		CODE				
4,0 x 6,0 mm	10,9 mm	1,5 - 3,0 mm	70701 40600	1100 N	1400 N	1000	10000
4,0 x 7,0 mm	11,9 mm	2,0 - 4,0 mm	70701 40700			1000	10000
4,0 x 8,0 mm	12,9 mm	3,0 - 5,0 mm	70701 40800			1000	10000
4,0 x 10,0 mm	14,9 mm	5,0 - 6,5 mm	70701 40100			1000	10000
4,0 x 12,0 mm	16,9 mm	6,5 - 8,5 mm	70701 40120			1000	10000
4,0 x 14,0 mm	18,9 mm	8,5 - 10,5 mm	70701 40140			500	5000
4,0 x 16,0 mm	20,9 mm	10,5 - 12,5 mm	70701 40160			500	5000
4,0 x 18,0 mm	22,9 mm	12,5 - 14,5 mm	70701 40180			500	5000
4,0 x 20,0 mm	24,9 mm	14,5 - 16,5 mm	70701 40200			500	5000
4,0 x 23,0 mm	27,9 mm	16,5 - 19,0 mm	70701 40230			500	5000
4,0 x 25,0 mm	29,9 mm	19,0 - 21,5 mm	70701 40250	850 N	1000 N	500	5000
4,0 x 30,0 mm	34,9 mm	21,5 - 26,0 mm	70701 40300			500	5000
4,0 x 35,0 mm	39,9 mm	26,0 - 30,0 mm	70701 40350			500	5000

Ø 4,8 mm

D1 = 4,8 + 0,08 / - 0,15 mm
D2 = 9,5 + 0 / - 1,0 mm
k = 1,1 + / - 0,3 mm
d = 2,7 mm
P = ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,9 mm

	F-Max		CODE				
4,8 x 6,0 mm	11,4 mm	1,0 - 3,0 mm	70701 48600	1500 N	1900 N	500	5000
4,8 x 8,0 mm	13,4 mm	3,0 - 4,5 mm	70701 48800			500	5000
4,8 x 10,0 mm	15,4 mm	4,5 - 6,0 mm	70701 48100			500	5000
4,8 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70701 48120			500	5000
4,8 x 14,0 mm	19,4 mm	8,0 - 10,0 mm	70701 48140			500	5000
4,8 x 16,0 mm	21,4 mm	10,0 - 12,0 mm	70701 48160			500	5000
4,8 x 18,0 mm	23,4 mm	12,0 - 14,0 mm	70701 48180			500	5000
4,8 x 20,0 mm	25,4 mm	14,0 - 16,0 mm	70701 48200			500	5000
4,8 x 22,0 mm	27,4 mm	16,0 - 18,0 mm	70701 48220			500	5000
4,8 x 25,0 mm	30,4 mm	18,0 - 21,0 mm	70701 48250			500	5000
4,8 x 28,0 mm	33,4 mm	21,0 - 23,5 mm	70701 48280	250	2500		
4,8 x 30,0 mm	35,4 mm	23,0 - 25,0 mm	70701 48300	250	2500		
4,8 x 35,0 mm	40,4 mm	25,0 - 30,0 mm	70701 48350	1200 N	1700 N	250	2500
4,8 x 40,0 mm	45,4 mm	30,0 - 35,0 mm	70701 48400			250	2500
4,8 x 45,0 mm	50,4 mm	35,0 - 40,0 mm	70701 48450			100	1000
4,8 x 50,0 mm	55,4 mm	40,0 - 45,0 mm	70701 48500			100	1000
4,8 x 55,0 mm	60,4 mm	45,0 - 50,0 mm	70701 48550			100	1000
4,8 x 60,0 mm	65,4 mm	50,0 - 55,0 mm	70701 48610			100	1000
4,8 x 65,0 mm	70,4 mm	55,0 - 60,0 mm	70701 48650	100	1000		

BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15977)

BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15977)

RIVETS AVEUGLES

TÊTE PLATE (~ DIN EN ISO 15977)

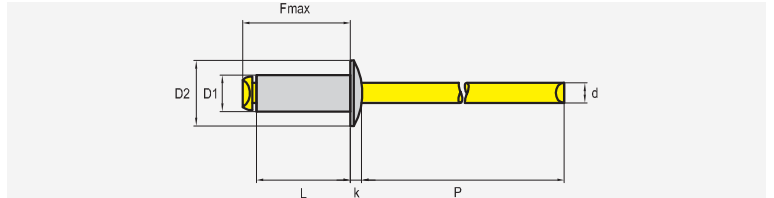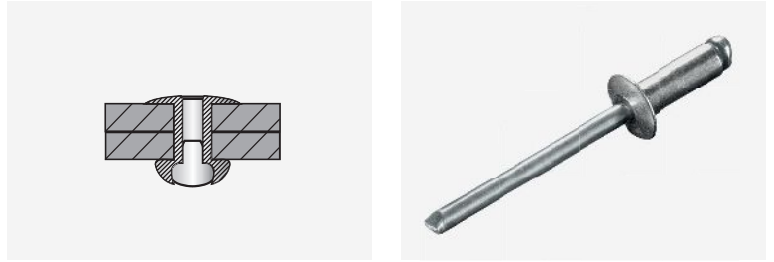

Aluminium AIMG 3,5
Aluminium AIMG 3,5
Aluminium AIMG 3,5

Stahl verzinkt
Steel zinc plated
Acier zingué

Ø 5,0 mm

D1 = 5,0 + 0,08 / - 0,15 mm

D2 = 9,5 + 0 / - 1,0 mm

k = 1,1 + / - 0,3 mm

d = 2,7 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

5,1 mm

	F-Max		CODE				
5,0 x 6,0 mm	11,4 mm	0,5 - 2,5 mm	70701 50600	1820 N	2100 N	500	5000
5,0 x 8,0 mm	13,4 mm	2,5 - 4,5 mm	70701 50800			500	5000
5,0 x 10,0 mm	15,4 mm	4,5 - 6,0 mm	70701 50100			500	5000
5,0 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70701 50120			500	5000
5,0 x 14,0 mm	19,4 mm	8,0 - 10,0 mm	70701 50140			500	5000
5,0 x 16,0 mm	21,4 mm	10,0 - 12,0 mm	70701 50160			500	5000
5,0 x 18,0 mm	23,4 mm	12,0 - 14,0 mm	70701 50180			500	5000
5,0 x 20,0 mm	25,4 mm	14,0 - 16,0 mm	70701 50200			250	2500
5,0 x 25,0 mm	30,4 mm	17,0 - 20,0 mm	70701 50250			250	2500
5,0 x 27,0 mm	32,4 mm	20,0 - 23,0 mm	70701 50270			250	2500
5,0 x 30,0 mm	35,4 mm	23,0 - 25,0 mm	70701 50300	1400 N	1800 N	250	2500
5,0 x 35,0 mm	40,4 mm	25,0 - 30,0 mm	70701 50350			250	2500
5,0 x 40,0 mm	45,4 mm	30,0 - 35,0 mm	70701 50400			100	1000
5,0 x 45,0 mm	50,4 mm	35,0 - 40,0 mm	70701 50450			100	1000
5,0 x 50,0 mm	55,4 mm	40,0 - 45,0 mm	70701 50500			100	1000
5,0 x 55,0 mm	60,4 mm	45,0 - 50,0 mm	70701 50550			100	1000
5,0 x 60,0 mm	65,4 mm	50,0 - 55,0 mm	70701 50601			100	1000
5,0 x 65,0 mm	70,4 mm	55,0 - 60,0 mm	70701 50650			100	1000

Ø 6,0 mm

D1 = 6,0 + 0,08 / - 0,15 mm

D2 = 12,0 + 0 / - 1,5 mm

k = 1,5 + / - 0,4 mm

d = 3,6 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

6,1 mm

	F-Max		CODE				
6,0 x 8,0 mm	13,9 mm	2,0 - 4,0 mm	70701 60800	2400 N	3400 N	250	2500
6,0 x 10,0 mm	15,9 mm	4,0 - 6,0 mm	70701 60100			250	2500
6,0 x 12,0 mm	17,9 mm	6,0 - 8,0 mm	70701 60120			250	2500
6,0 x 14,0 mm	19,9 mm	7,0 - 9,0 mm	70701 60140			250	2500
6,0 x 16,0 mm	21,9 mm	9,0 - 11,0 mm	70701 60160			250	2500
6,0 x 18,0 mm	23,9 mm	11,0 - 13,0 mm	70701 60180			250	2500
6,0 x 20,0 mm	25,9 mm	12,0 - 15,0 mm	70701 60200			250	2500
6,0 x 22,0 mm	27,9 mm	13,0 - 17,0 mm	70701 60220			250	2500
6,0 x 25,0 mm	30,9 mm	16,0 - 19,0 mm	70701 60250			250	2500
6,0 x 26,0 mm	31,9 mm	17,0 - 20,0 mm	70701 60260			250	2500
6,0 x 30,0 mm	35,9 mm	20,0 - 24,0 mm	70701 60300	250	2500		

BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15977)

BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15977)

RIVETS AVEUGLES

TÊTE PLATE (~ DIN EN ISO 15977)

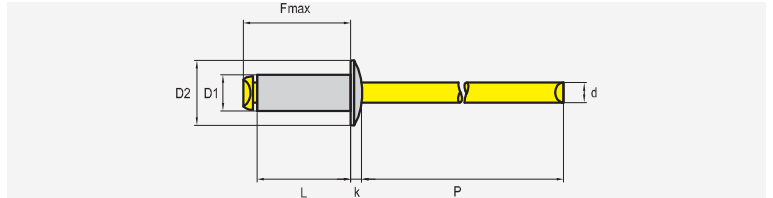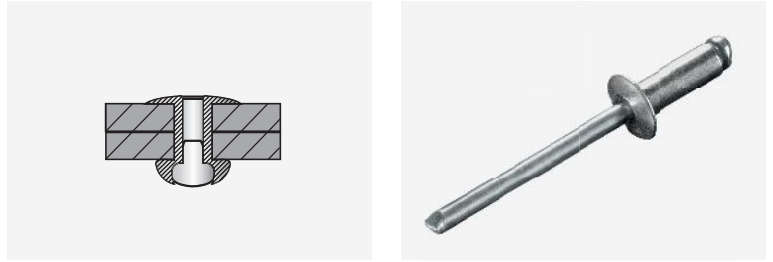

Aluminium AIMG 3,5
Aluminium AIMG 3,5
Aluminium AIMG 3,5

Stahl verzinkt
Steel zinc plated
Acier zingué

Ø 6,4 mm

D1 = 6,4 + 0,08 / - 0,15 mm

D2 = 13,0 + 0 / - 1,5 mm







k = 1,8 + / - 0,4 mm

d = 3,85 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

 6,5 mm

	F-Max		CODE				
6,4 x 10,0 mm	16,4 mm	2,0 - 5,0 mm	70701 64100	2600 N	4000 N	250	2500
6,4 x 12,0 mm	18,4 mm	4,0 - 6,0 mm	70701 64120			250	2500
6,4 x 15,0 mm	21,4 mm	6,0 - 9,0 mm	70701 64150			250	2500
6,4 x 16,0 mm	22,4 mm	7,0 - 9,5 mm	70701 64160			250	2500
6,4 x 18,0 mm	24,4 mm	9,0 - 12,0 mm	70701 64180			250	2500
6,4 x 20,0 mm	26,4 mm	11,0 - 14,0 mm	70701 64200			250	2500
6,4 x 22,0 mm	28,4 mm	13,0 - 16,0 mm	70701 64220			250	2500
6,4 x 26,0 mm	32,4 mm	16,0 - 20,0 mm	70701 64260			250	2500
6,4 x 30,0 mm	36,4 mm	18,0 - 24,0 mm	70701 64300			250	2500
6,4 x 35,0 mm	41,4 mm	24,0 - 30,0 mm	70701 64350			100	1000
6,4 x 40,0 mm	46,4 mm	30,0 - 35,0 mm	70701 64400			100	1000