

## BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 16582)

## BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 16582)

## RIVETS AVEUGLES


TÊTE PLATE (~ DIN EN ISO 16582)

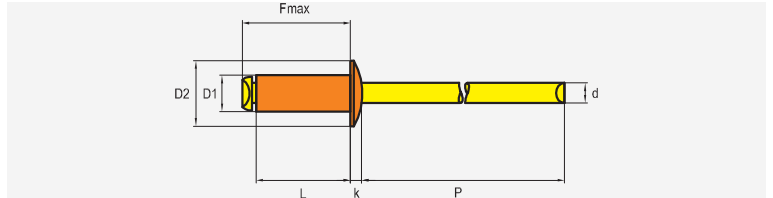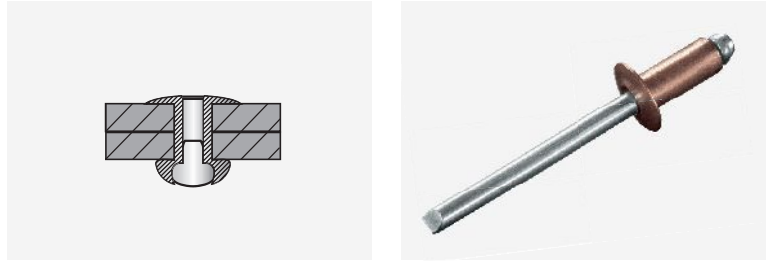







Kupfer Legierung  
Copper alloy  
Cuivre alliage


Stahl verzinkt  
Steel zinc plated  
Acier zingué







### Ø 3,0 mm

D1 = 3,0 + 0,08 / - 0,1 mm  
D2 = 6,5 + 0 / - 0,7 mm  
k = 0,8 + / - 0,2 mm  
d = 1,75 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 3,1 mm


|  | F-Max   |  | CODE        |  |  |  |  |
|---|---------|--|-------------|---|---|---|---|
| 3,0 x 4,0 mm  | 8,4 mm  | 0,5 - 1,5 mm   | 70501 30400 | 600 N   | 700 N   | 1000  | 10000   |
| 3,0 x 6,0 mm  | 10,4 mm | 1,0 - 3,0 mm   | 70501 30600 |   |   | 1000  | 10000   |
| 3,0 x 8,0 mm  | 12,4 mm | 3,0 - 5,0 mm   | 70501 30800 |   |   | 1000  | 10000   |
| 3,0 x 10,0 mm   | 14,4 mm | 5,0 - 7,0 mm   | 70501 30100 |   |   | 1000  | 10000   |
| 3,0 x 12,0 mm   | 16,4 mm | 7,0 - 9,0 mm   | 70501 30120 |   |   | 1000  | 10000   |







### Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm  
D2 = 6,5 + 0 / - 0,7 mm  
k = 0,8 + / - 0,2 mm  
d = 1,95 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 3,3 mm


|  | F-Max   |  | CODE        |  |  |  |  |
|---|---------|--|-------------|---|---|---|---|
| 3,2 x 6,0 mm  | 10,9 mm | 1,0 - 3,0 mm   | 70501 32600 | 700 N   | 800 N   | 1000  | 10000   |
| 3,2 x 8,0 mm  | 12,9 mm | 3,0 - 5,0 mm   | 70501 32800 |   |   | 1000  | 10000   |
| 3,2 x 10,0 mm   | 14,9 mm | 5,0 - 7,0 mm   | 70501 32100 |   |   | 1000  | 10000   |
| 3,2 x 12,0 mm   | 16,9 mm | 7,0 - 9,0 mm   | 70501 32120 |   |   | 1000  | 10000   |







### Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm  
D2 = 8,0 + 0 / - 1,0 mm  
k = 1,0 + / - 0,3 mm  
d = 2,1 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 4,1 mm

|  | F-Max   |  | CODE        |  |  |  |  |
|---|---------|--|-------------|---|---|---|---|
| 4,0 x 6,0 mm  | 10,9 mm | 1,0 - 2,0 mm   | 70501 40600 | 1000 N  | 1500 N  | 1000  | 10000   |
| 4,0 x 8,0 mm  | 12,9 mm | 2,0 - 4,0 mm   | 70501 40800 |   |   | 1000  | 10000   |
| 4,0 x 10,0 mm   | 14,9 mm | 4,0 - 6,0 mm   | 70501 40100 |   |   | 1000  | 10000   |
| 4,0 x 12,0 mm   | 16,9 mm | 6,0 - 8,0 mm   | 70501 40120 |   |   | 1000  | 10000   |
| 4,0 x 14,0 mm   | 18,9 mm | 8,0 - 10,0 mm  | 70501 40140 |   |   | 500   | 5000  |
| 4,0 x 16,0 mm   | 20,9 mm | 10,0 - 12,0 mm   | 70501 40160 |   |   | 500   | 5000  |

### Ø 4,8 mm

D1 = 4,8 + 0,08 / - 0,15 mm  
D2 = 9,5 + 0 / - 1,0 mm  
k = 1,1 + / - 0,3 mm  
d = 2,7 mm  
P ≥ 27,0 mm  
L = + 1,0 / - 0,2 mm  
 4,9 mm

|  | F-Max   |  | CODE        |  |  |  |  |
|---|---------|--|-------------|---|---|---|---|
| 4,8 x 8,0 mm  | 13,4 mm | 1,5 - 3,5 mm   | 70501 48800 | 1500 N  | 2000 N  | 500   | 5000  |
| 4,8 x 10,0 mm   | 15,4 mm | 3,5 - 5,5 mm   | 70501 48100 |   |   | 500   | 5000  |
| 4,8 x 12,0 mm   | 17,4 mm | 5,5 - 7,5 mm   | 70501 48120 |   |   | 500   | 5000  |
| 4,8 x 14,0 mm   | 19,4 mm | 7,5 - 9,5 mm   | 70501 48140 |   |   | 500   | 5000  |
| 4,8 x 16,0 mm   | 21,4 mm | 9,5 - 11,5 mm  | 70501 48160 |   |   | 500   | 5000  |
| 4,8 x 18,0 mm   | 23,4 mm | 11,5 - 13,5 mm   | 70501 48180 |   |   | 500   | 5000  |
| 4,8 x 20,0 mm   | 25,4 mm | 13,5 - 15,5 mm   | 70501 48200 |   |   | 500   | 5000  |