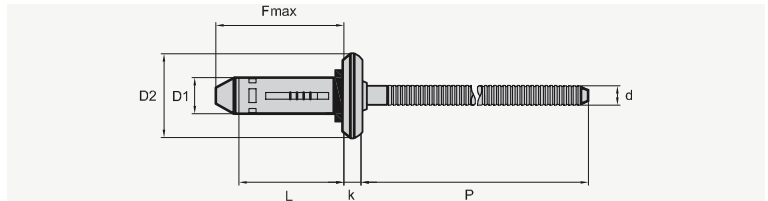


PRESSLASCHENBLINDNIETE (KONSTRUKTIONSBAU) FLACHRUNDKOPF MIT GERILLTEM NIETDORN


TRIPLE CLAW BLIND RIVETS (CONSTRUCTION) DOMED HEAD WITH GROOVED MANDREL








RIVETS TRIPLE (ENGINEERING) TÊTE PLATE CLOU CANNELÉ




Aluminium AIMG 5 Aluminium AlCuMg 1 mit EPDM Dichtscheibe
Aluminium AIMG 5 Aluminium AlCuMg 1 with EPDM washer
Aluminium AIMG 5 Aluminium AlCuMg 1 avec rondelle en EPDM








Ø 5,2 mm

D1 = 5,1 + 0,09 / - 0,1 mm
D2 = 11,5 + 0 / - 0,2 mm
k = 2,2 + / - 0,3 mm
d = 2,9 mm + / - 0,1 mm
P = ≥ 25,4 mm
L = + 0,5 / - 0,8 mm + / - 0,4 mm
 5,3 - 5,5 mm


	F-Max						
5,2 x 17,5 mm	22,1 mm	1,3 - 4,8 mm	70880 05217	2700 N	1950 N	250	2500
5,2 x 19,1 mm	23,7 mm	1,6 - 6,4 mm	80805 52190			250	2500
5,2 x 22,2 mm	26,9 mm	4,7 - 9,5 mm	80805 52220			250	2500
5,2 x 25,4 mm	30,1 mm	7,9 - 12,7 mm	80805 52250			250	2500
5,2 x 28,6 mm	33,3 mm	11,1 - 15,9 mm	80805 52280			250	2500
5,2 x 31,8 mm	38,6 mm	14,3 - 19,1 mm	80805 52310			250	2500








Ø 6,3 mm

D1 = 6,3 + / - 0,1 mm
D2 = 14,4 + / - 0,3 mm
k = 3,8 + / - 0,2 mm
d = 3,9 mm + / - 0,1 mm
P = ≥ 25,4 mm
L = + 0,5 / - 0,8 mm + / - 0,4 mm
 6,4 - 6,6 mm

	F-Max						
6,3 x 20,2 mm	24,7 mm	1,6 - 6,4 mm	80805 63202	3780 N	2250 N	250	2500
6,3 x 23,4 mm	27,9 mm	3,2 - 9,5 mm	80805 63234			250	2500
6,3 x 26,5 mm	31,0 mm	6,4 - 12,7 mm	80805 63265			250	2500
6,3 x 29,7 mm	34,2 mm	9,5 - 15,9 mm	80805 63297			250	2500

Ø 7,5 mm

D1 = 7,6 + / - 0,2 mm
D2 = 18,6 + / - 0,5 mm
k = 5,0 + / - 0,3 mm
d = 4,3 mm + / - 0,2 mm
P = ≥ 25,4 mm
L = + 0,5 / - 0,8 mm + / - 0,5 mm
 7,8 - 8,2 mm

	F-Max						
7,5 x 28,0 mm	32,2 mm	1,1 - 9,5 mm	80805 75280	5500 N	4400 N	250	2500
7,5 x 34,0 mm	38,2 mm	6,4 - 15,9 mm	80805 75340			250	2500
7,5 x 37,0 mm	41,2 mm	9,5 - 19,1 mm	80805 75370			250	2500

Zur Verarbeitung der „TRE-GO“ ist ein spezielles Mundstück zu verwenden.

For the processing of blind rivets „TRE-GO“ a special mouthpiece must be used.

Vous devez utiliser une pièce de pose spéciale pour poser les rivets „TRE-GO“.

