




## SENKKOPF (100°) MIT GERILLEM NIETDORN COUNTERSUNK HEAD (100°) WITH GROOVED MANDREL TÊTE FRAISÉE (100°) CLOU CANNELÉ






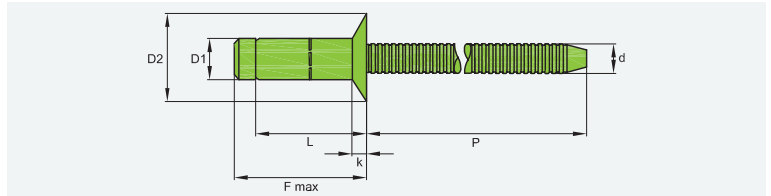

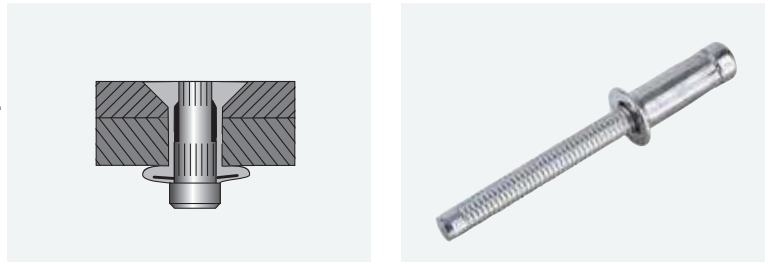







Edelstahl A2 [ 1.4567 ]  
Stainless steel A2 [ AISI 302 ]  
Acier inox A2 [ 1.4567 ]


Edelstahl A2 [ 1.4301 ]  
Stainless steel A2 [ AISI 304 ]  
Acier inox A2 [ 1.4301 ]
























### Ø 4,8 mm

D1 = 4,8 + 0,08 / - 0,15 mm  
D2 = 8,8 + / - 0,40 mm  
k = 1,8 + / - 0,40 mm  
d = 3,1 + 0,10 / - 0,10 mm  
P = ≥ 30,0 mm  
L = + 0,5 / - 0,2 mm  
 4,9 - 5,1 mm

	F max		CODE					
4,8 x 11,5 mm	15,0 mm	3,5 - 6,0 mm	78404 48115	3500 N	5100 N	445 N		
4,8 x 14,0 mm	17,5 mm	6,0 - 8,5 mm	78404 48140	4500 N				
4,8 x 16,5 mm	20,0 mm	8,5 - 10,0 mm	78404 48160	5500 N				

### Ø 6,4 mm

D1 = 6,4 + 0,08 / - 0,15 mm  
D2 = 10,6 + / - 0,40 mm  
k = 2,0 + / - 0,40 mm  
d = 4,17 + 0,10 / - 0,10 mm  
P = ≥ 32,0 mm  
L = + 0,5 / - 0,2 mm  
 6,5 - 6,7 mm

	F max		CODE					
6,4 x 11,5 mm	16,0 mm	3,8 - 5,8 mm	78404 64115	9100 N	8000 N	1112 N		
6,4 x 12,5 mm	17,0 mm	4,8 - 6,8 mm	78404 64125	10100 N				
6,4 x 13,5 mm	18,0 mm	5,8 - 7,8 mm	78404 64135					
6,4 x 15,5 mm	20,0 mm	7,8 - 9,8 mm	78404 64155	11100 N				
6,4 x 17,5 mm	22,0 mm	9,8 - 11,8 mm	78404 64175					
6,4 x 19,5 mm	24,0 mm	11,8 - 13,8 mm	78404 64195					
6,4 x 21,5 mm	26,0 mm	13,8 - 15,8 mm	78404 64215					
6,4 x 23,5 mm	28,0 mm	15,8 - 17,8 mm	78404 64235					

<sup>1)</sup> typische Werte typical values valeurs typiques

Technische Änderungen vorbehalten Subject to technical modifications Sous réserve de modifications (techniques)